


**PB / PW**

Inline booster

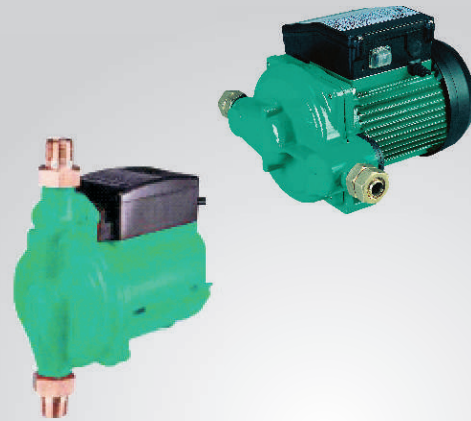

WILO Mather and Platt Pumps Pvt. Ltd.  
Mumbai Pune Road,  
Chinchwad, Pune – 411 019.  
Maharashtra (India)

T +91 20 27442100  
F +91 20 27442111  
Service Toll Free: 1800 266 8866

[www.matherplatt.com](http://www.matherplatt.com) / [www.wilo.in](http://www.wilo.in)  
[sales@matherplatt.com](mailto:sales@matherplatt.com)

[www.facebook.com/WiloIndia](https://www.facebook.com/WiloIndia)

Tech. matter subject to change without prior notice

PB/PW\_01072015

## PB

### Inline Booster



#### Technical Data:

**Flow:** upto 80 LPM  
**Head:** upto 19 mts  
**Power:** upto 400 Watt

#### Application:

- Pressure boosting water transfer from roof tank to tap
- Wobbler
- Silent operation

#### Standard Features:

- Automatic/manual operation
- Easy to carry, install and operate Motor built with Thermal Protector for safety
- Rust-proof casting by electric coating

#### Selection Table

Pump Model	LPM	0	5	10	15	20	25	30	35	40	45	50	55	60	65	75	
PB88	Head (m)	9	9	8	7	16	14	3	1								
PB200		15	15	14	13	13	12	10	9	8	5	4	1				
PB400		20	19	18	17	16	15	15	13	12	11	10	9	8	2	1	
PW122		30	24	19	13	9	4										
PW252		43	39	35	31	26	22	18	13	9	4						

**Conversion Table:** 1 m = 3.281 ft and 1 m<sup>3</sup>/hr = 16.67 LPM = 3.67 GPM

## PW

### Peripheral in line booster



#### Technical Data:

**Flow:** 40 LPM  
**Head:** 45 mts

#### Application:

- Boosting water pressure at taps and showers
- Water supply for household use
- Water transfer for small machines and instruments
- Sprinkler systems
- Gardening and car washing

#### Standard Features:

- Self priming function
- Automatic operation
- Thermal protector to avoid motor burn out
- Efficient cooling for motor by specially designed cooling fan
- Easy to carry, install and operate